

Also available from Panelock Systems Ltd.

Gallery Display System 200

Individual modular freestanding display units incorporating the patented Panelock retractable undercarriage for relocation. Fully demountable display units which can link together to form intricate display wall configurations.

Gallery Display System 400

A unique patented system of individual moveable non-load bearing display panels, which require the installation of an overhead aluminium guide track. Panels can be locked in any position through 360 degrees to the track.

Gallery Display System 600

Individual display panels identical to System 400 but do not require an overhead guide track. Panels simply lock between the floor and ceiling requiring no fixings to the structure.

PANELOCK® **PANELOCK®**

Gallery Display System




Panelock are sponsors of TEG



Panelock Systems Ltd is an award winner under the Governments Business Pairing

Museums Association



Corporate member


E-mail: sales@panelock.com
 Web: www.panelock.com



Panelock Gallery Display System 100 is a system of modular aluminium framed, individual free standing display panels which can interlock to form continuous display walls



Gallery Display System 100

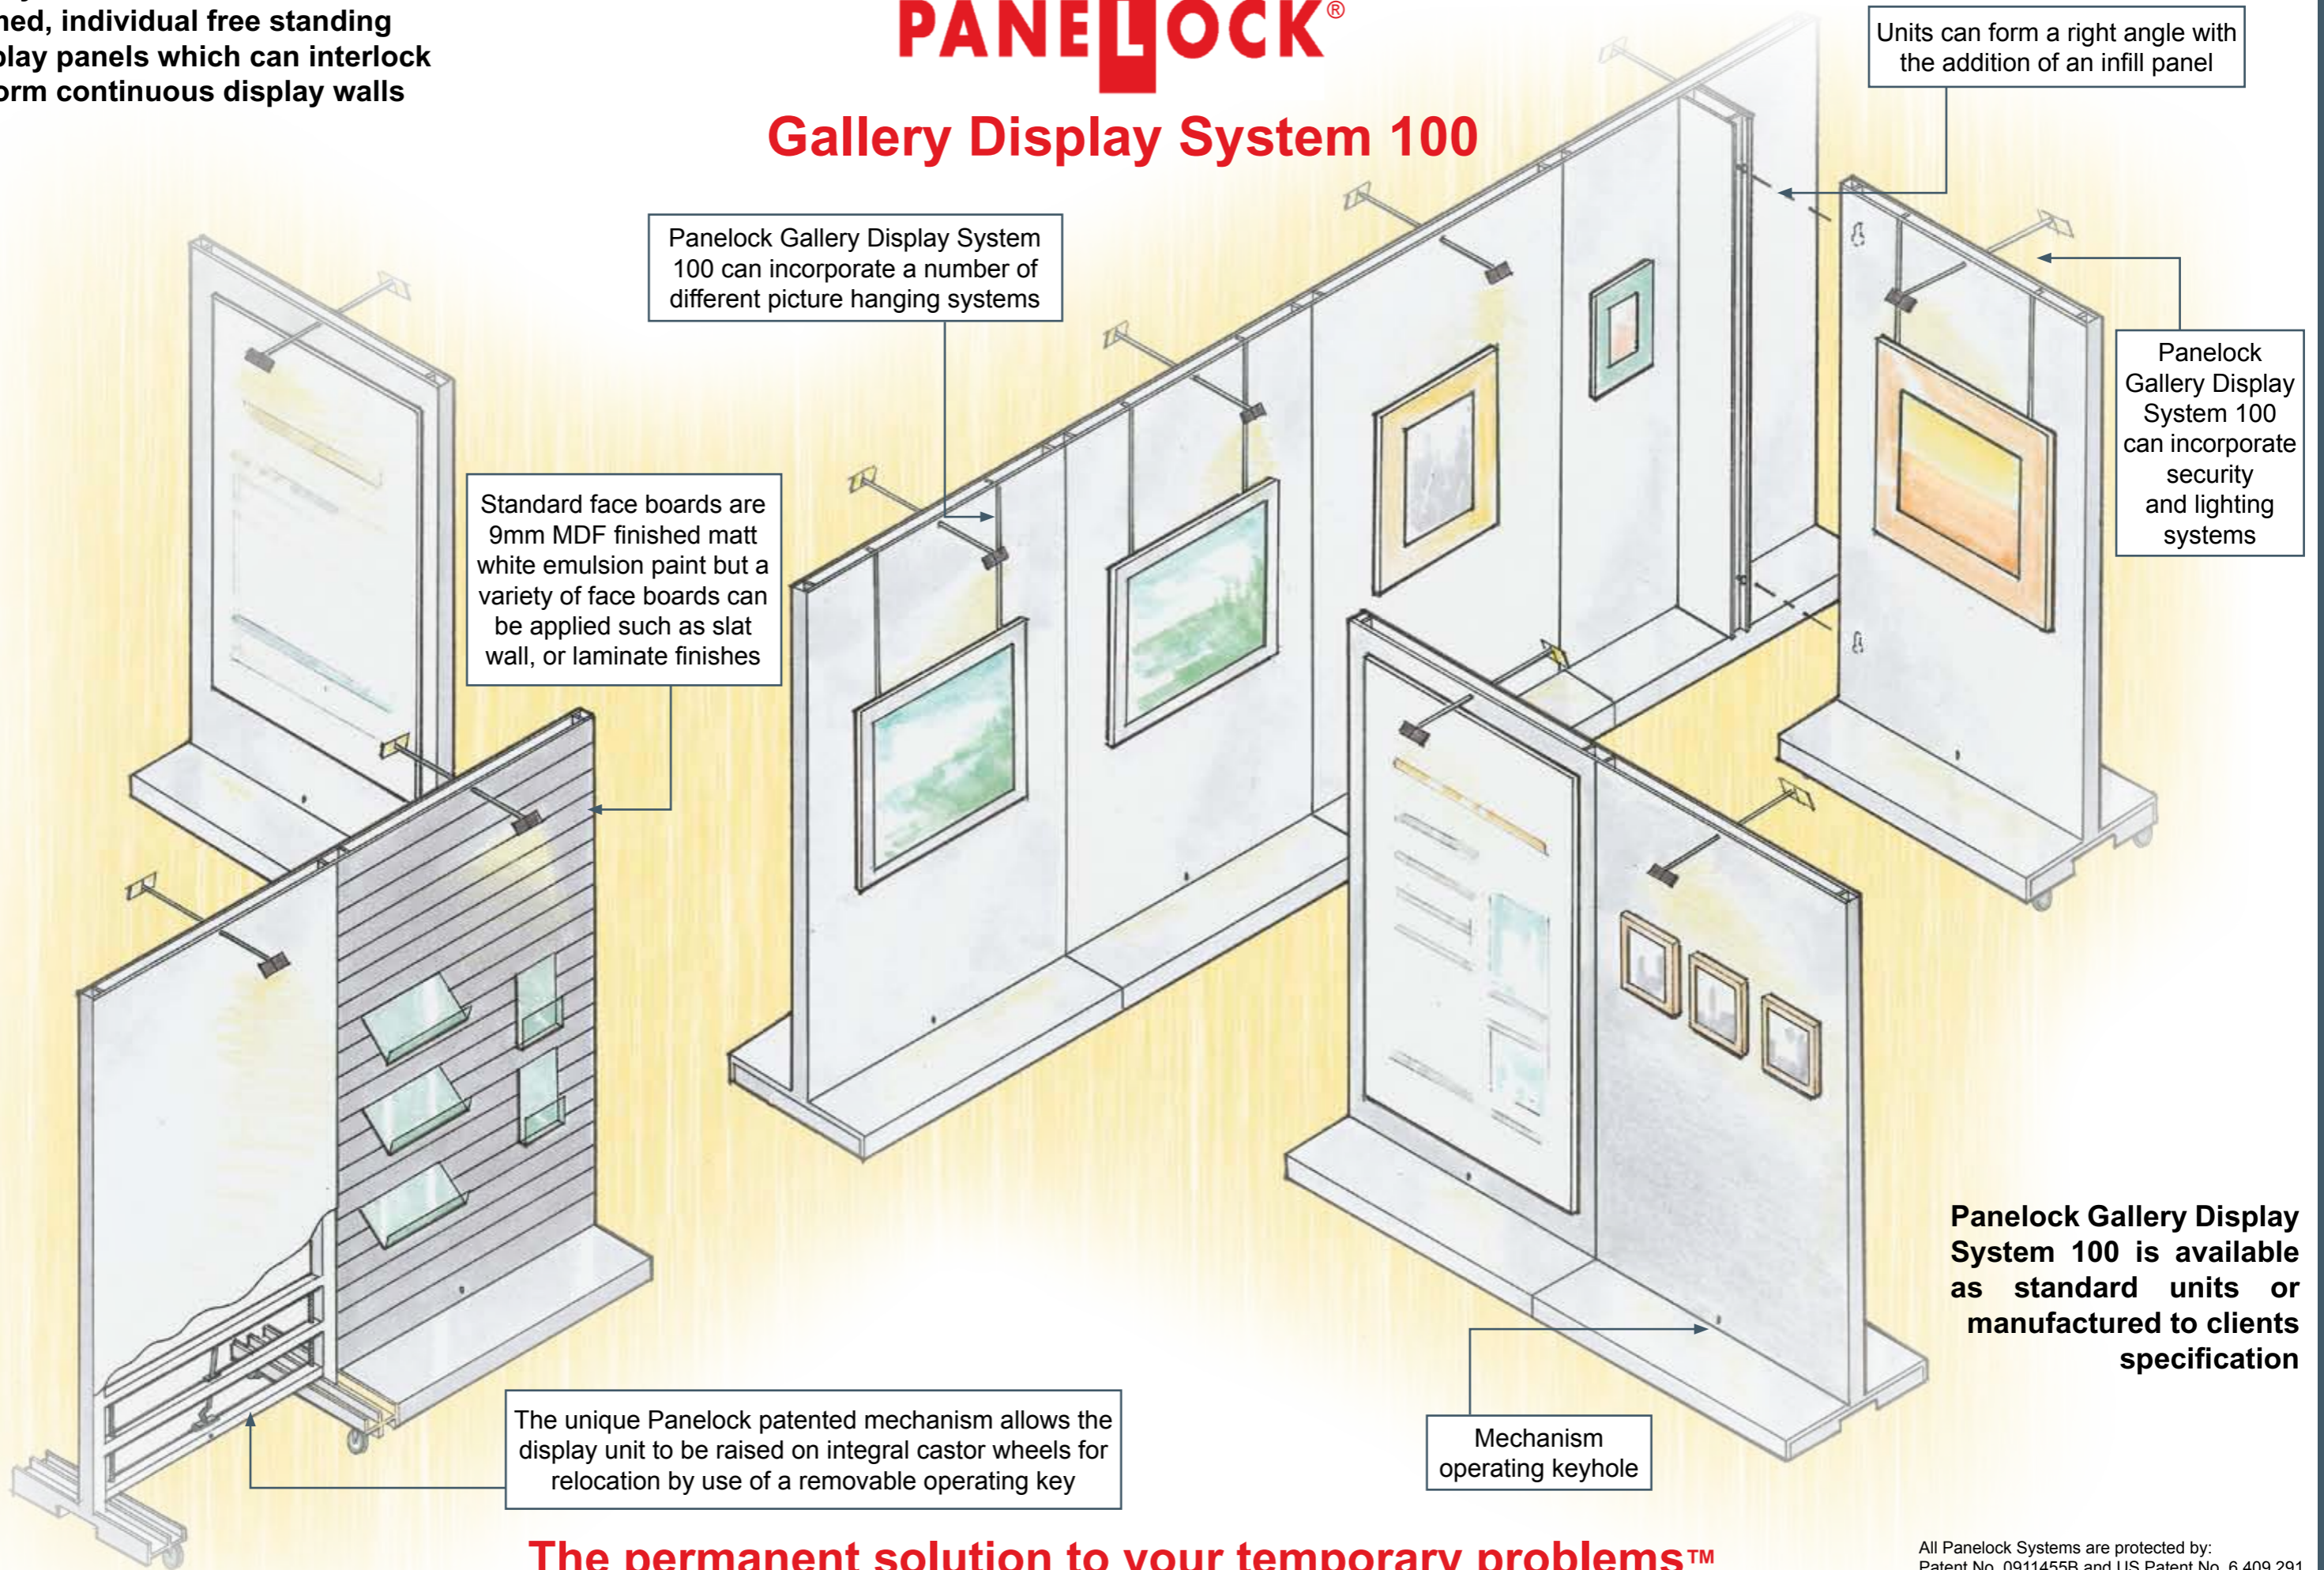

Panelock Gallery Display System 100 can incorporate a number of different picture hanging systems

Standard face boards are 9mm MDF finished matt white emulsion paint but a variety of face boards can be applied such as slat wall, or laminate finishes

Units can form a right angle with the addition of an infill panel

Panelock Gallery Display System 100 can incorporate security and lighting systems

The unique Panelock patented mechanism allows the display unit to be raised on integral castor wheels for relocation by use of a removable operating key

Mechanism operating keyhole

Panelock Gallery Display System 100 is available as standard units or manufactured to clients specification

The permanent solution to your temporary problems™

All Panelock Systems are protected by:
Patent No. 0911455B and US Patent No. 6,409,291